



สำนักงานการบินพลเรือนแห่งประเทศไทย
The Civil Aviation Authority of Thailand

Guidance Material for Meteorological information and services to support ATM operations

CAAT-GM-ANS-MSATM

Revision: 00

Date: 01 November 2022

Approved by

A blue ink signature of Suttipong Kongpool, written in a cursive style.

Suttipong Kongpool

Director General of the Civil Aviation Authority of Thailand

Intentionally Left Blank

Table of Contents

Table of Contents	1
Abbreviations	2
0. Introduction.....	3
0.1 Background	3
0.2 Purpose	3
0.3 Applicability	3
0.4 Reference.....	4
1. Implemetaion procedures.....	5
1.1 Preparation phase (Processes toward implementation).....	5
1.2 Operational phase	6
1.3 Continuous improvement	7
2. MET information and services to support ATM	7
2.1 ATM-tailored meteorological information	7
2.2 Information and products developed for other use.....	7
2.3 Weather briefing to support ATM Operational phase	8
2.4 Participation of MET service provider in CDM	8
2.5 Mean of provision.....	9
3. Future prograss in MET/ATM services.....	9
3.1 Global Air Navigation Plan (GANP)	9
3.2 Future intregation of MET information into ATM dication making	9
3.3 Next geration air transportation system developments	10
4. Example of MET Information and services to support ATM	APP 1-1
4.1 Appendix 1	APP 1-1
4.2 Appendix 2	APP 2-1

Abbreviations

Abbreviations	Meaning
AN-Conf	Air Navigation Conference
APAC	Asia and Pacific Region
APANPIRG	Asia/Pacific Air Navigation Planning and Implementation Regional Group
ASBU	Aviation System Block Upgrades
ATC	Air traffic Control
ATFM	Air Traffic Flow Management
ATM	Air Traffic Management
ATMetC	Air Traffic Meteorology Center
ATMRPP	Air Traffic Management Requirements and Performance Panel
CARATS	Collaborative Actions for Renovation of Air Traffic Systems
CDM	Collaborative Decision Making
GANP	Global Air Navigation Plan
GATMOC	Global ATM Operational Concept
ICAO	International Civil Aviation Organization
MET	Meteorological Services for Air Navigation
MET/ATM TF	Meteorology/Air Traffic Management Task Force
METP	Meteorology Panel
MET/R WG	Meteorological Requirements Working Group
OPMET	Operational Meteorological/Meteorology
SESAR	Single European Sky ATM Research
SIGWX	Significant Weather
TCA	Tropical Cyclone Advisory
VAA	Volcanic Ash Advisory
WAFS	World Area Forecast System
WITEM	Wind and Temperature

0. Introduction

0.1 Background

0.1.1 Since ICAO endorsed the Global Air Traffic Management Operational Concept (GATMOC, Doc 9854) in 1996, States have worked on the enhancement of ATM. In the APAC Region, since the late 1990s, ATM (and ATFM) has evolved significantly in many States. Subsequently, tailored MET information and services has been recognized as critical information for the effective provision of ATM and subsequently has been incorporated as part of the strategic and tactical ATM operations of those States. Nowadays MET Service Providers in Thailand are providing MET information for ATM operations according to ICAO standard such as TAF, METAR/SPECI and SIGMET. However, these MET information are not meet ATM requirement. MET information to support ATM operations should be included in the logic of a decision process, and the impact of the meteorological conditions on the operations should be automatically derived, understood and taken into account. Support for tactical in-flight avoidance of hazardous meteorological conditions (improved in-flight situational awareness) to typical near-term and planning (>20 minutes) type of decision making. Specifically, the addition of probabilistic forecasts will provide decision makers with an assessment of the likelihood of some meteorological phenomena/parameters exceeding a defined magnitude (or threshold) at a particular time and place. The probabilistic element further helps decision makers apply their own operational constraints (i.e. business rules) to determine the risk to their operations

0.1.2 In 2001, the ICAO APANPIRG Communications/Navigation/Surveillance and Meteorology Sub-Group (CNS/MET SG) formed the MET/ATM Task Force (TF) to facilitate regional implementation of meteorological services to support ATM. The first Regional MET/ATM Seminar was held at the ICAO Regional Office in Bangkok, Thailand, in February 2006. In order to enhance regional implementation, in 2009, APANPIRG agreed to call for the 1st meeting of the MET/ATM TF to plan the 2nd Regional MET/ATM Seminar and TF Meeting in the 2010 timeframe. In February 2011, the Seminar and the 2nd meeting of the TF were held in Fukuoka, Japan, where experts from MET, ATM and other international organizations in the APAC region gathered to discuss their plans and best practices on the development and implementation of meteorological services in support of ATM. The meeting also included a technical tour to the ATMetC to provide an example of the collaborative work undertaken between MET and ATM organisations. Subsequent TF meetings, and later the MET/R Working Group, successor to the MET/ATM TF, continued the important work of developing regional guidance to assist Asia/Pacific States with implementation or improvement of MET information and services to support ATM.

0.2 Purpose

0.2.1 This guidance is a framework for MET Service providers to establish MET information and services to support the ATM operations.

0.2.2 To support the ATM operations in Thailand with MET information and services, particularly short and long-term plan for its air traffic management scheme.

0.2.3 To encourage MET service providers to learn more about MET information and services for ATM Operations from the examples set by other countries, within this guidance.

0.3 Applicability

The provisions of this guidance apply to MET Service providers, who are Air navigation service certificate holders from CAAT, in order to provide additional MET information to meet ATM operations requirement.

0.4 Reference

- ASIA/PACIFIC REGIONAL GUIDANCE FOR TAILORED METEOROLOGICAL INFORMATION AND SERVICES TO SUPPORT AIR TRAFFIC MANAGEMENT OPERATIONS Second Edition, October 2021
- International Civil Aviation Organization (ICAO) Annex 3 - Meteorological Service for International Air Navigation
- Global Air Traffic Management Operational Concept (Doc 9854)
- Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services (Doc 9377)
- Air Traffic Management (Doc 4444)
- GANP Portal (<https://www4.icao.int/ganportal/>)

1. Implementation Procedure

1.1 Preparatory Phase (Processes toward implementation)

1.1.1 Communication Channel Establishment

- (a) The most important step in the implementation of ATM-tailored MET information and service is to establish a good communication channel for mutual collaboration between MET and ATM organizations through periodic meetings, tours to each operation room and so on. To develop and facilitate an implementation plan, it would be useful to exchange views and information and build mutual understanding of each other's services, through regular consultations and meetings with clear focus.
- (b) In addition, consultation with collaborative decision-making (CDM) stakeholders from the initial stage will be desirable for a smoother and better planning. This will further assist in the implementation process, given that CDM is an essential element in the ATM operational concept and concerned parties including airspace users, such as airlines, state aircraft operators, and flight training academy are encouraged to participate in CDM.

1.1.2 Service Identification

- (a) Understanding ATM and aircraft operations
MET Service Providers should have a good understanding of the Thailand's ATM operations as it is necessary to determine the scope of MET information and services to support ATM. This aspect will assist in understanding the local ATM requirements and determining the most appropriate process.

Additionally, procedures for aircraft operations, adopted by airspace users, are also important in defining ATM-tailored MET information and services, for example, each aircraft has maximum crosswind threshold values for take-off and landing. Adverse weather conditions may force aircraft to fly irregular flight routes and conduct unusual operations, which could result in significant diversion from the normal and planned distribution of air traffic. In this context, understanding aircraft operational procedures is helpful in designing a *fit-for-purpose* MET information and services
- (b) Past Events and Case Studies
Investigation of MET-related impacts on air traffic flow is essential to determine what kind of MET information and services are required to effectively support ATM operations. One practical approach, in cooperation with airlines, is to compare operational records (including causes of delay, if available) with past weather data. Once ATFM is implemented, focus could be toward more direct ways to use the flow management records in the ATFM process, in addition to the aircraft operations records for the comparison with past MET data.
- (c) Service proposal (Proposal from MET organization)
Through the process mentioned in (a) and (b), it is expected to obtain better understanding of the ATM processes based on aircraft operational procedures and possible weather impact on air traffic flow. The next step would be to develop a draft plan for MET information and services in support of ATM and to provide a proposal to the ATM organization. The proposed plan could be conceptual process with specific explanation and prototypes of MET information or services, should be sought on the proposal.

- (d) Service development (Requirements from ATM organization)
With the feedback from the ATM organization described in (c), the MET and ATM organisations could adjust and make necessary changes to the proposed plan. This will ensure that both parties (MET and ATM) are aware of the requirements and limitations, and are able to adopt a practical plan for the region.
This would be an iterative process, until the proposed plan for MET information and services becomes matured.
- (e) Service definition
Once the proposed plan is mature, the provision of MET information and services in support of ATM operations can be formalized. The plan should also describe how the ATM tailored MET products will be utilised in conjunction with the other MET products, this should be made available to the airspace users in a timely fashion so that all stakeholders are in possession of the same information at the same time. It may be that bespoke MET information solutions, tailored to the specific ATM service provider, are also made available to the airspace users as part of CDM arrangements.

1.1.3 System Development

The next step is to develop a system and associated software applications necessary to provide ATM-tailored information and services defined in section 1.1.2 (e)

1.1.4 Trial Run of the System and Service

It is essential to conduct a trial of the system and procedures to test secure delivery of the defined MET information and services. If any issues are identified through the trial, they should be resolved through close consultation with the stakeholders concerned (mainly the ATM organizations), before the service becomes operational. In addition, the trial process will assist in determining the system reliability. The outcomes of the trial and lessons learnt should be well documented to assist with future requirements.

1.1.5 Service Provision Agreement

In parallel with the system development, to ensure that continuous provision of the defined MET information and services is maintained, it is important to formalize a written agreement (or to amend an existing agreement, if applicable) between the MET and ATM organizations. The Agreement should include the MET and ATM capabilities, and outline the operational processes, the working relationship and the communication channels. When such an agreement is later implemented with airlines or other stakeholders, existing agreements should also be amended accordingly.

1.2 Operational Phase

1.2.1 Operational Trial

Before MET information and services are provided operationally, an operational trial should be conducted so that aviation forecasters and ATM officers can familiarize themselves with the provision and usage of the new information and services. The trial period should be set based on agreement between the parties concerned. A post implementation of the operational trial should be conducted in collaboration with all stakeholders to ensure lessons learnt from the process are documented and improvements are made prior to implementation.

1.2.2 Provision of MET Information and Services

MET information and services developed according to the process described in 1.1 are provided to ATM officers in accordance with the service provision agreement between the MET and ATM organizations.

1.2.3 Verification and Evaluation

After the implementation of ATM-tailored MET information and services, it is required (i) to regularly verify and evaluate its quality to ensure that it practically supports ATM, when a meteorological condition has a significant impact on ATM. It is also recommended that stakeholders conduct a post-event analysis to identify lessons learnt. (ii) to improve MET information and services

1.3 Continuous Improvement

Regular evaluation meetings between relevant parties such as airspace users, ATM and MET organizations are one of the basic approaches to continuously improve the implemented information and services. These meetings should draw from the results of verification and evaluation as well as lessons learnt from significant events, to identify changes and innovations to continually improve MET information and services.

2. MET Information and Services to Support ATM

2.1 ATM-Tailored Meteorological Information

2.1.1 Impact-based Weather Information

- (a) Tailored MET information that shows possible impact on air traffic flow (e.g. when and where the weather phenomenon affects air traffic flow) can be useful to support the management of air traffic capacity in each aerodrome, ATC sector and execution of air traffic flow management measures.
- (b) Information, that is relevant to the impact to air traffic flow, is extremely valuable; for example, a probabilistic forecast of impact to ATFM may provide a quantitative estimate of reduction in air traffic capacity. To develop such impact-based information, consensus among stakeholders has to be developed regarding relationships between specific meteorological conditions and their possible impacts on air traffic flow.

2.1.2 Information for Common Situational Awareness

- (a) It would be helpful for ATM representatives and other relevant stakeholders to have a basic understanding of relevant meteorological conditions (e.g. occurrence process and characteristics), as well as the associated forecast confidence, which would facilitate risk assessment to enable more effective and efficient ATM operations. It is desirable to provide relevant graphical information which can explain meteorological conditions effectively, such as pressure distribution charts, weather radar and satellite imagery, and/or weather advisories with simple associated descriptions

2.1.3 Examples of MET Information and Services for ATM from other States

- (a) Examples of MET information and services for ATM in some States are described in Appendix 1. In addition, operational scenarios of MET/ATM collaboration, such as how MET information and services are provided to ATM officers, are described in Appendix 2.

2.2 Information and Products Developed for other use

2.2.1 Existing meteorological information may also be useful to support ATM. Some examples are listed below.

- OPMET information
- Volcanic ash advisory (VAA) and tropical cyclone advisory (TCA)
- WAFS products (Wind and Temperature (Wind/Temp) chart, SIGWX chart and gridded global forecast of wind, temperature, cumulonimbus clouds, icing and turbulence)

- Real-time observational data at congested aerodromes
- Weather radar imagery
 - Weather radar imagery and animation that cover ATM's area of responsibility. This data can be chosen and overlaid with the ATS routes or real time aircraft position.
- Specific phenomena based information, such as Thunderstorm and lightning information
- Satellite imagery and derived products
 - Satellite imagery and animation that cover ATM's area of responsibility. This data can be chosen and overlaid with the ATS routes or real time aircraft position.
- Nowcasting products
 - 2hr convection nowcast for arrival/departure corridors, particularly the airport with high density of air traffic.
- Numerical weather prediction data and derived products
 - 9hr performance-based weather forecast for the aerodrome
 - More than 12hr significant convection forecast time series for key ATC areas based on blended NWP and nowcasting.
- Earthquake and tsunami information
- Space weather
- Means of provision

2.3 Weather Briefing to Support ATM Operational Phase

2.3.1 Direct weather briefings for ATM officers is an effective method to share current and expected weather assessments in and around major aerodromes Terminal Control Area and ATS routes, including any expected impacts on aircraft operation and air traffic flow.

2.3.2 Regular weather briefings in support of ATM may be provided several times per day. Depending on rostered shift arrangements in ATS units, MET briefings may be scheduled for groups of controllers just prior to commencing their operational duty.

2.3.3 Where unexpected weather phenomena may affect aircraft operation and/or air traffic flow, or the actual weather deviates significantly from that forecast, a special briefing should be provided by aviation forecasters. Special briefings can be either proposed by aviation forecasters or requested by ATM officers.

2.4 Participation of MET Service Provider in CDM

2.4.1 CDM is an approach where relevant stakeholders share necessary information in order to make decisions collaboratively to enable enhanced ATM operations. This process involves a collaboration of stakeholders to generate products suitable for better pre-tactical traffic management strategies and optimised use of available capacity. The expected role of a MET organization in CDM is for aviation forecasters, with an understanding of the effects of meteorology on ATM, to provide necessary meteorological information at and around relevant aerodromes and air routes in a timely manner.

2.4.2 To achieve effective CDM, aviation forecasters should have a basic understanding of ATM and Air Traffic Control (ATC) procedures, such as, inter alia, runway weather minima and aircraft operating criteria so that they would be able to foresee aviation impacting weather and provide appropriate briefings to ATM officers in a timely manner.

2.4.3 Where an event or phenomena has a significant impact on normal air traffic flows (e.g.: mass deviation of aircraft), it is vital to ensure that common situational awareness is maintained at all times among affected stakeholders. Rapid identification of the possible cause of such a situation (e.g. adverse meteorological conditions, runway closure) allows both ATM and MET organizations to take immediate action in a collaborative manner to mitigate the impact.

2..5 Means of Provision

2.5.1 Dedicated Information Sharing System

- (a) To facilitate CDM, information sharing among all relevant stakeholders in MET and ATM is necessary, to ensure common situational awareness is maintained. In order to support ATM operations, a system should be acquired or developed which enables ATM officers to utilize MET information at any time. Similarly, aviation forecasters need an access to ATM-related information to provide appropriate MET information. It is thus required that dedicated systems for information sharing between MET and ATM organizations be established, so that ATM officers and aviation forecasters can effectively exchange information operationally.

2.5.2 Means of Communication

(a) Listed below are some examples of how ATM stakeholders can communicate and share necessary information.

- The aeronautical fixed service (i.e. AFTN/AMHS)
- Hotline (direct phone line)
- Web-chatting system
- Telephone or video conference system
- Use of common CDM software/application
- Joint use of an operation room
- Information sharing web-portal
- Radio (walkie talkie)
- Web-Conference

3. Future Progress in MET/ATM Services

3.1 Global Air Navigation Plan (GANP)

3.1.1 In 2014, the 38th Session of the ICAO Assembly amended the Global Air Navigation Plan (GANP) and formulated the Aviation Systems Block Upgrades (ASBUs), the implementation plan of the GANP, as proposed by the twelfth ICAO Air Navigation Conference (AN-Conf/12). The ICAO Meteorology Panel (METP) was established in September 2014 is tasked with providing standard and recommended practices for MET information and services in support of ATM for the terminal area and in line with the aviation system block upgrades (ASBU).

3.1.2 In the future, States in a position to do so would be required to provide ATM-tailored MET services based on globally consistent requirements. Since this global standardization is being welcomed among users such as airlines and pilots, the States in the APAC Region may adapt their systems accordingly when such standards are available.

3.2 Future Integration of MET Information Into ATM Decision-Making

3.2.1 The ICAO Air Traffic Management Requirements and Performance Panel (ATMRPP), in coordination with the METP and other panels concerned, has discussed future integration of MET information into ATM decision-making system, along with the Global Air Traffic Management Operational Concept (GATMOC) (ICAO Doc 9854). The “Concept for the integration of Meteorological information for ATM” has been developed by the ATMRPP and other bodies concerned. It provides guidance on methods and

procedures to interpret MET information as it relates to possible constraints on air traffic flow. It supports estimation of the potential impact of the meteorological condition to ATM and provides ATM officers with possible actions to be taken, e.g. selecting the safest routes while minimising diversions.

3.3 Next Generation Air Transportation System Developments

3.3.1 To deal with growing air traffic congestion, some States or Regions have been planning the development of next generation air transportation systems. These include NextGen (United States), SESAR (Europe) and CARATS (Japan). It is important for MET organizations to make the best effort to improve their capability in the provision of MET information and services to meet such future requirements and facilitate the development of a new generation air transportation system.

4. Example of MET Information and Services to Support ATM

4.1 Appendix 1 Examples of MET Information and Services for ATM in some States

Hong Kong, China

1. ATM-tailored MET information and services

Under the agreement between the Hong Kong Observatory (HKO) and Civil Aviation Department (CAD), HKO provides a suite of ATM-tailored MET information and services in support of international air navigation.

1.1 Tactical Decision Products

1.1.1 Taking the opportunity of the replacement of CAD's Air Traffic Management System (ATMS), closer integration of tailored MET information with ATMS was realized to support ATC in tactical decision making. These include a) 10 layers of Constant Altitude Plan Position Indicator (CAPPI) imageries from 1 km to 10 km with range 256 km of the two Doppler weather radars in Hong Kong; and b) 1 layer of the HKO Aviation Thunderstorm Nowcasting System (ATNS) 1hr forecast for the assessment of significant convection over HKFIR at 3 km height

1.1.2 On the ATC console of the new ATMS, either weather radar imagery of a specific height or an ATNS forecast can be chosen to be overlaid with the aircraft indicators (Figure 1). Further details can be found in the presentation included in JointSession ATFM/SG/7 and MET/R WG/6

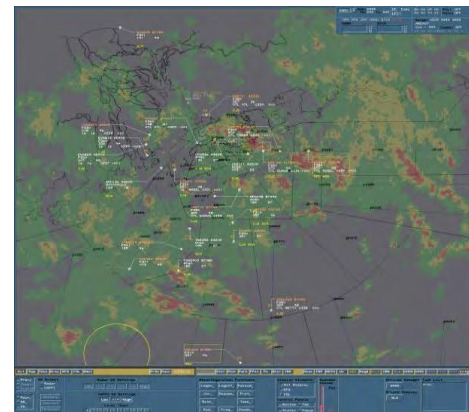


Figure 1 ATC console display showing aircraft positions overlaid on a CAPPI image

1.2 Meteorological Services for Terminal Area (MSTA) Products

1.2.1 The Hong Kong Air Traffic Flow Management Unit (ATFMU) of CAD regularly assesses the capacity of the Hong Kong International Airport (HKIA), which depends on both the runway and airspace capacity, in the next few hours. In collaboration with CAD, HKO has been providing tailored MSTA, grouped under the product named Significant Convection Monitoring and Forecast (Figure 2), to support ATFM operation since 2010. These are briefly summarized in the following paragraphs. Further details can be found in MET/R TF/3 WP07.

1.2.2 The suite of MSTA products to support runway capacity estimation includes amongst others, ATNS to automatically forecast the future location of weather cells that may block the intended flight path or significant points in the airspace. While forecasts of products D, E, and G in Figure 2 are generated automatically, they could be adjusted manually by Aviation Forecasters.

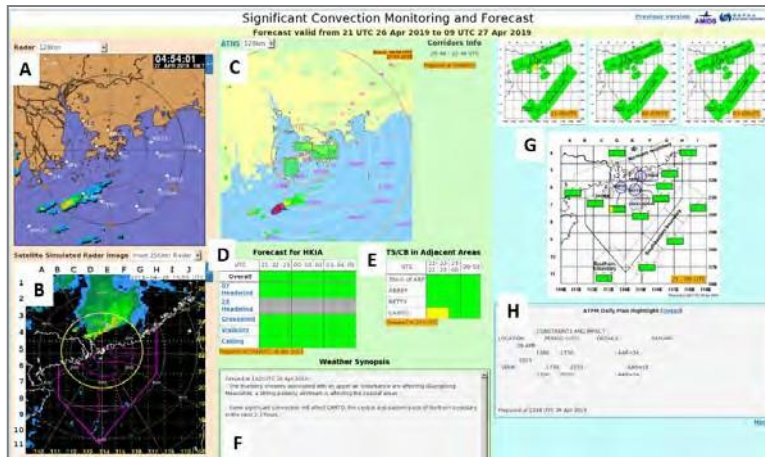


Figure 2. Integrated display of the MSTA: A) Choice of actual radar at different ranges and lightning overlays; B) Radar blended with satellite simulated radar image developed using Artificial Neural Network technology; C) 2hr convection nowcast for arrival/departure corridors by ATNS; D) 9hr performance-based weather forecast for the aerodrome; E) 6hr convection forecast around HKIA and major waypoints; F) weather synopsis around HKIA and the major waypoints; G) 12hr significant convection forecast time series for key ATC areas based on blended NWP and nowcasting outputs; and H) ATFM Daily Plan.

1.2.3 All the above products/systems use three levels of colour code to indicate the impact to air traffic, viz GREEN for mild or no impact, AMBER for medium impact and RED for significant impact. Though the actual criteria for defining the colour codes vary across different forecast products, the simple three levels of colour code are adopted uniformly in all the products described above. The Significant Convection Monitoring and Forecast also includes the latest ATFM Daily Plan issued by ATFMU after taking into account the above significant convection nowcast and forecast information as well as consultation by Aviation Forecaster via regular and ad hoc weather briefings (para.1.5 below).

1.3 Arrival Management and other Miscellaneous tailored Products

1.3.1 25 layers of gridded upper wind and temperature forecasts over HKFIR at a resolution of 0.2 degrees at hourly interval for up to 24 hours are provided to ATMS for trajectory prediction of individual aircraft and a system for aircraft arrival sequencing.

1.3.2 Apart from the above products, other major tailored products include a) Weather Summary for HKIA which includes, inter alia, local winds, radar, satellite, lightning information and lightning alert for the airport, weather synopsis, aerodrome forecast with possible alternative scenario, TAFs of nearby airports, SIGMET for the HKFIR, TC track, weather analysis and forecast charts (Figure 3); b) HKIA Local Routine/Special Report and c) MET page showing the latest observation, data from the Automatic Meteorological Observing System, windshear alerts, forecast of HKIA and neighbouring aerodrome.

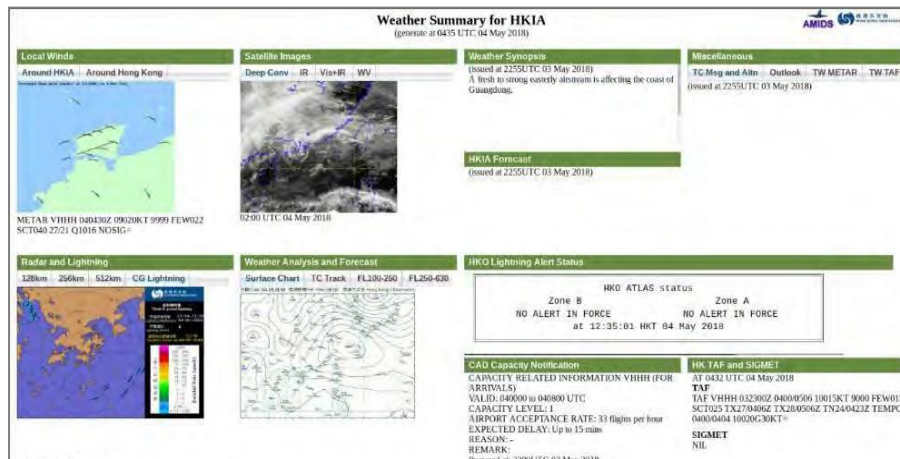


Figure 3. HKO Weather Summary for HKIA

1.4 Lightning Nowcast Products

1.4.1 For the protection of ground personnel from being injured by lightning strikes, HKO has developed the Airport Thunderstorm and Lightning Alerting System (ATLAS), a nowcasting system for detecting and nowcasting lightning activities over HKIA. The system generates RED or AMBER alerts based on either detection or forecast of cloud-to-ground lightning activities (CG). When CG is detected within 10 km or forecast to be within 5 km from the ARP, AMBER alert will be issued. When CG is detected or forecast to be within 1 km boundary of the alert zones (respectively encompass the Chek Lap Kok Island, and the majority of passenger and cargo apron), RED alert will be issued for the corresponding zone.

1.5 Integrated monitoring system for MET-ATM

1.5.1 HKO has developed two integrated monitoring pages for aviation forecasters to appreciate the weather impact on air traffic. One displays the real time aircraft positions together with weather radar (Figure 4, Left). Another one displays arrival and departure rates and any traffic interruption messages from ATIS and NOTAM (Figure 5, Right). These two pages heighten common situation awareness and enhance the communications between MET and ATM office particularly during weather briefings (para. 1.6).

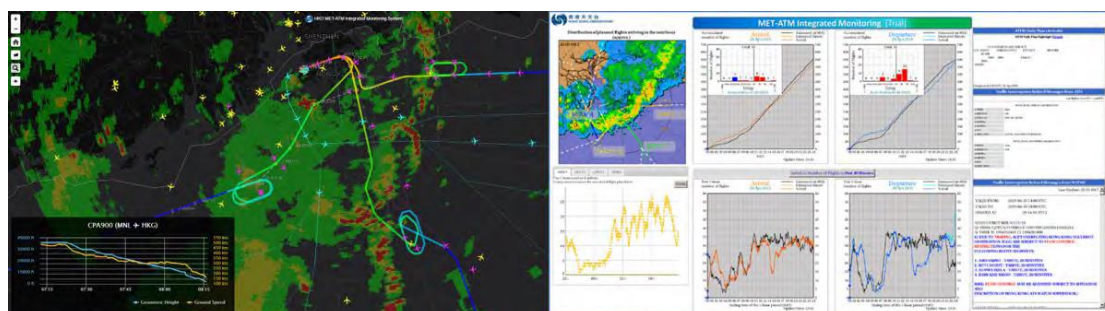


Figure 4. MET-ATM Integrated Displays showing arrival flights forced into holding patterns due to convective activities (Left) and the arrival/departure rates (Right).

1.6 Regional SIGMET monitoring

1.6.1 To support Hong Kong ATFMU’s participation in Distributed Multi-Nodal ATFM Network trial operation, HKO has developed an Integrated Monitoring webpage to show real-time en-route hazardous weather within the APAC region. Information provided includes SIGMET and advisory information, as well as VONA, METAR, TAF, PIREP, global satellite imageries, radar reflectivity, lightning, numerical weather prediction data, significant convection and turbulence forecast, etc., for ATFMU’s reference (Figure 5).

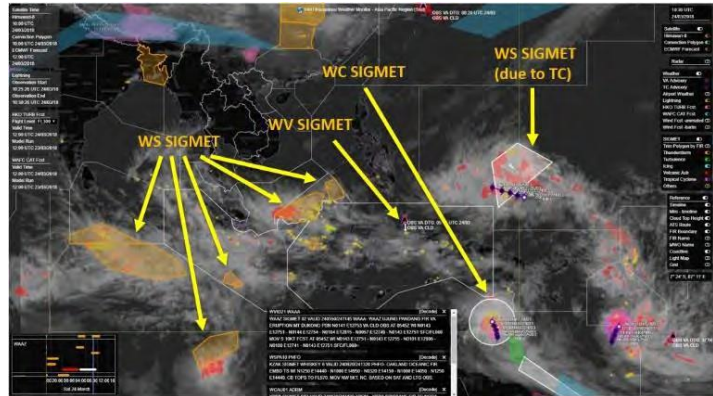


Figure 5. HKO Regional SIGMET Monitoring P

1.7 Weather briefing

1.7.1 HKO provides MET weather briefings to ATFMU/ATC three times a day, once in the early morning, once at noon and once in the early evening, through teleconference. The briefing mainly makes use of the MSTA products and the Weather Summary for HKIA discussed under 1.2 and 1.3.2 above. Timely updates are also provided through a hotline should there be any change in the weather conditions.

1.7.2 In preparation for adverse weather such as the approach of tropical cyclone (TC), additional weather briefings are conducted for the whole aviation community at HKIA to heighten common situation awareness and to support Collaborative Decision Making.

2. Means of Provision

2.1 The tactical decision products and the arrival management products discussed under para. 1.2 and 1.3.1 respectively are ingested directly into CAD’s ATMS. Products under para. 1.3.2 b) are sent to CAD's ATS Data Management System (ATSDMS).

2.2 The rest of the products, including MSTA and miscellaneous tailored products are provided via the web-based Aviation Meteorological Information Dissemination System.

3. Other useful information

3.1 Regular high level meetings with CAD and the Airport Authority Hong Kong are held on an annual basis. Regular working level meetings with ATC are held generally a few times every year.

3.2 A Verification System has been set up for verification of both the ICAO Annex 3 and MSTA products.

Japan

1. ATM-tailored MET information and Services

1.1 ATMetC, TMAT, NCAT (Figure 1)

The Japan Civil Aviation Bureau (JCAB) established the Air Traffic Management Center (ATMC) in Fukuoka in 2005 as a core organization for ATM in Fukuoka FIR. In line with ICAO's global concept for ATM, ATMC facilitates safe and efficient flight operation through ATM close cooperation with Airspace Management (ASM), Air Traffic Flow Management (ATFM) and oceanic ATM. At the same time as ATMC began operation, the Japan Meteorological Agency (JMA) established the Air Traffic Meteorology Center (ATMetC) to provide meteorological information and services in support of ATMC, and started their operation in 2006. ATMetC forecasters work in the same operation room as ATM officers to directly provide weather information and briefings tailored to ATM officers' needs. ATMetC preparations were carried out over a period of three years (see MET/ATMSeminar 2013 IP/3).

For tactical and flexible ATFM to deal with increased air traffic, JCAB subsequently organized Traffic Management Units (TMUs) operating as ATMC branches – two in the Tokyo metropolitan area and one at New Chitose airport (a local major hub where aircraft operation is significantly affected by snowstorm). To support TMU operation with detailed ATM-tailored meteorological information on related airports and air space, JMA organized two teams operating as branches of ATMetC – the Tokyo Metropolitan Area Team (TMAT) at Tokyo International airport and New Chitose Area Team (NCAT) – in different offices at the same location to operate as TMUs. (See MET/R WG/5 IP/10, MET/R WG/8 IP/18).

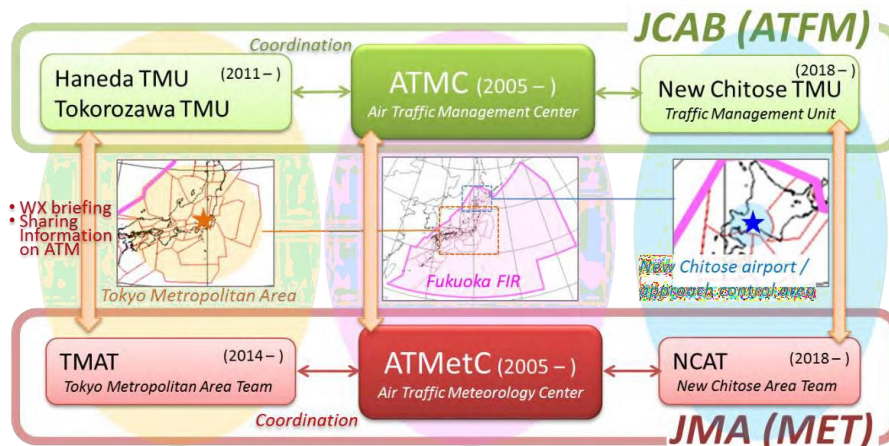


Figure 1 MET organization and target areas for supporting ATM in Japan

MET information and services specifically tailored for ATM requirements are as follows.

1.2 CDM conferences

Daily online ATMC conferences held at 0620 and 2345 UTC for collaborative decision making (CDM) are attended by ATM, ATC and airline officers, with an ATMetC officer providing MET information targeted at Fukuoka FIR and neighboring FIRs. TMAT and NCAT officers in attendance also contribute MET information. Additional conferences are also held as necessary except midnight.

1.3 Briefings (regular/extra)

ATMetC, TMAT and NCAT officers provide weather briefings to ATM officers based on the ATMC and TMU areas of responsibility (e.g., the Fukuoka FIR for ATMetC, Tokyo ACC areas of responsibility and Tokyo approach control area for TMAT) as detailed in Section 2. Briefings are provided regularly before ATM officers start work or before traffic congestion begins

(e.g., 4 times/day by TMAT), with additional briefings as necessary in line with changing weather conditions.

1.4 Wx Bulletins (Figure 2)

TMAT and NCAT provide at-a-glance meteorological information for ATM officers during work shifts and periods of traffic congestion. The bulletins contain brief comments on phenomena expected to affect air traffic flow and imagery highlighting weather conditions and forecasts for the next 6 hours (see MET/R WG/5 IP/10, MET/R WG/8 IP/18 and MET/R WG/9 IP/1)

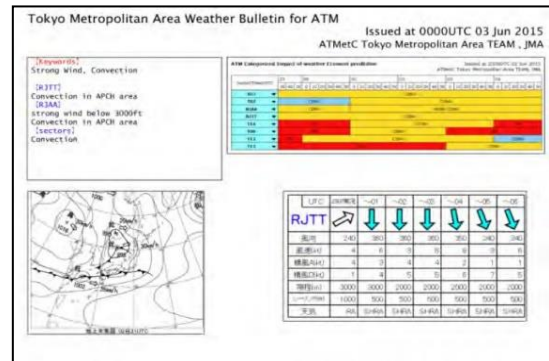


Figure 2 WX Bulletin

1.5 Impact-based category forecasts for supporting ATM

ATMetC and TMAT provide sequential category forecasts indicating expected impacts of weather conditions on air traffic flow in color-coded categories.

Forecasts are issued hourly outside the nighttime hours of 14 to 16 UTC when air traffic volumes are low. The forecast period of up to six hours supports ATM officers with ATFM operations.

- Target weather phenomena are followings:
 - Airports: Thunderstorm, Visibility, Ceiling, Wind, etc.
 - Approach control area: CBs, Convective clouds and Wind
 - ATC sectors: CBs, Convective cloud Product specifications are outlined below



Figure 3 ATMet Category Forecast

1.5.1 ATMet Category Forecast (Air Traffic Meteorological Category Forecast) (Figure 3)

- Target areas: major airports and ATC sectors in Japan
- Contents: the potential for meteorological impact on air traffic flow with four color-coded categories (red, yellow, blue and white)
- Temporal resolution: 1 hour (see MET/ATM Seminar 2011 WP/9*)

1.5.2 ATM CIEL (ATM Categorized Impact of weather Elements prediction) (Figure 4)

- Target areas: Tokyo/Narita international airport, Tokyo approach control area and ATC sectors around the Tokyo metropolitan area

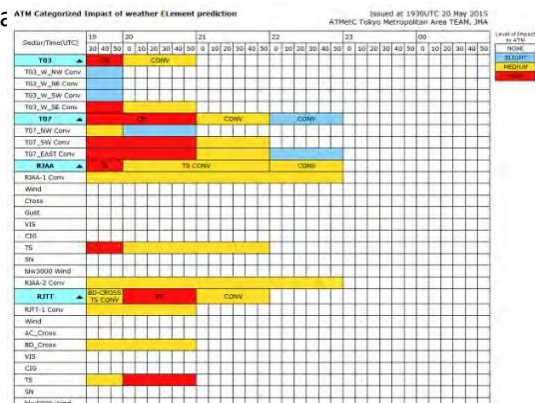


Figure 4 ATM CIEL

- Contents: level of expected impact of significant weather on ATC operations
 - ✧ High : Need to reduce capacity value (CAPA) significantly
 - ✧ Medium : Need to reduce CAPA
 - ✧ Slight : Need to reduce CAPA slightly
 - ✧ None : Not need to reduce CAPA
- Temporal resolution: 10 minutes to 1 hour
 (see MET/ATM Seminar 2015 IP/7*)

1.5.3 ECLAIR (Estimated convective Cloud impact on AIR-routes) (Figure 5)

The ECLAIR provides route-based information. It is semi-automated NWP-based product incorporates the level of expected impact of convective cloud forecasted in ATM CIEL which is manually produced by TMAT forecasters (see MET/R WG/9 IP/1). Product specifications are as follows:

- Target air routes: main RJTT/RJAA arrival/departure routes
- Content: levels of expected impact of convective cloud on individual air routes with more precise categorization than ATM CIEL
- Issuance: hourly (except 14 - 16 UTC)
- Forecast period: up to 6 hours (temporal resolution: 10 minutes to 1 hour)

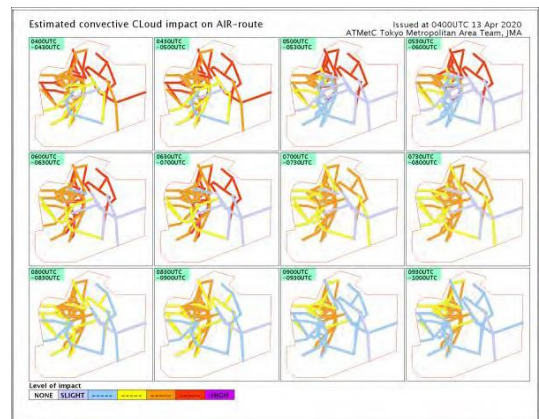


Figure 5 ECLAIR

1.6 Other information

JMA automatically provides the following information in addition to the OPMET data via ATMets described in Section 2.1.

- Analysis and hourly forecasts of upper-wind speed/direction on major air-routes (updated hourly; figure 6)
- Observation data including weather radar (three-dimensional vertical/horizontal sectional viewing), Doppler radar for airport weather, lidar and 6-second aerodrome observations

東海から関東上空の風予想表

地点名	ALT/UTC	19日07時	19日09時	19日12時	19日15時	19日18時
河和 (KOHWA)	FL350	260 61	270 57	280 62	290 71	290 75
	FL250	270 32	280 35	280 37	290 40	290 40
徳州 (ENSYU)	FL310	260 49	270 46	270 46	280 52	280 60
	FL190	280 39	280 40	290 38	300 31	300 28
大島 (XAC)	FL230	270 42	270 39	280 36	280 32	280 33
	13000FT	290 29	290 30	290 26	300 19	330 20
館山 (UTTIBO)	10000FT	300 25	300 23	290 18	300 19	330 20
	5000FT	030 04	360 05	290 04	260 05	280 12
木更津 (KZT)	10000FT	300 26	300 24	300 22	310 23	320 22
	5000FT	210 01	340 05	020 02	240 08	270 17
羽田 RJTT	SFC	180 08	190 10	200 06	240 04	300 05

Figure 6 Upper-wind analysis/forecast

- Seismic intensity for quakes at major airports, along with tsunami warnings where necessary (ASAP post-earthquake)
- NWP model output provided via Adverse Weather Forecast for Tokyo Metropolitan Area (see ICAO APAC MET/R WG/9 IP1)

2. Means of Information and Service Provision

ATMetC and NCAT provide information and services via direct interaction, as ATMetC and NCAT officers work in close proximity to ATM officers. (i.e. ATMetC officers share the operations room with ATM officers, and NCAT officers are able to visit ATM officers' operation room.) TMAT provides information via telephone and TV conferencing due to limited proximity. The JMA systems outlined below also allow sharing of MET information to support ATM.

2.1 ATMets

The ATMets information sharing system for ATM officers provides the products described in Section 1 via terminals on each ATM officer's desk.

2.2 MetAir

The MetAir weather information system allows not only ATM officers but also aviation users to obtain MET products for airspace and aerodrome on a real time basis. Airlines can receive them through MetAir.

2.2 Web chat system

To support the need for prompt decision making in ATM within terminal areas, speedy and appropriate information sharing is necessary even if ATM and MET officers are unable to share their operations room. For weather briefing services in particular, TMAT and NCAT coordinate with TMUs as needed via online chat for live interaction in addition to video conferencing and telephone communication. As text information remains in the chat tool, TMU officers can reaffirm the contents of briefings at any time. Also, graphical information can be posted on the tool (Figure 7). This function helps TMU officers to easily understand the weather condition which is sometimes difficult to grasp only by the explanation on the telephone.

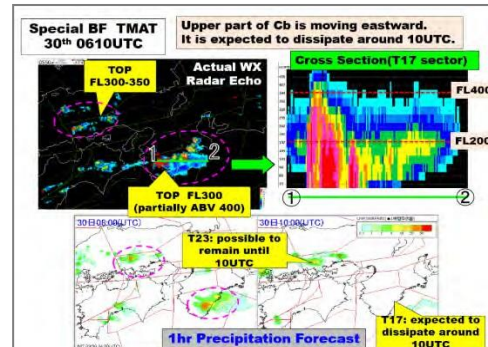


Figure 7 Graphical info on online chat tool

3. Continuous improvement of services

3.1 Verification

ATMet category forecast criteria are weather conditions (or sometimes a combination thereof) defined through verification processes carried out by ATMetC in coordination with ATMC. This process involves three main steps:

- a) Investigation of impacts on ATM in previous significant cases;
- b) Confirmation of operational rules and conditions with reference to aircraft operation manuals and flight operations manuals; and
- c) Checking of the latest requirements from ATM officers, such as high-priority airways and
- d) altitude, and important air navigation facilities (waypoints or typical holding areas).

Each criterion is verified by calculating the Weather Impact Ratio (WXIR), which is the ratio of the frequency of cases in which a weather condition has influenced air traffic flow to all cases of the weather condition concerned.

Meteorological services provided to support ATM need to be flexibly applicable to the various operational variables of such management, including ATC procedures, airways and aircraft types, which are also developed in parallel. It is therefore highly important to ensure close and continuous coordination with ATM officers in order to revise criteria appropriately based on the results of verification using WXIR in consideration of operational requirements. Through such continuous improvement, the gap between ATM operational requirements and MET capability can finally be closed (Figure 8). (As of October 2021)

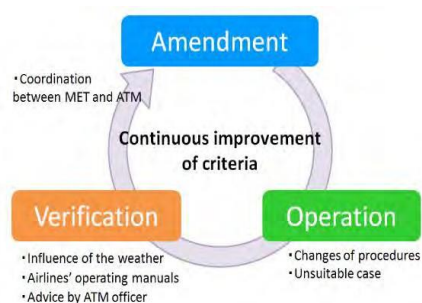


Figure 8 Continuous improvement of criteria

* The product specifications have been updated from those described in this paper.

Singapore

1. ATM-tailored MET information and services

Meteorological and Air Traffic Management (MET/ATM) Collaboration in Singapore

The provision of air navigation services in the Singapore Flight Information Region (FIR) is undertaken by the Civil Aviation Authority of Singapore (CAAS), and Meteorological Service Singapore (MSS) is the aeronautical meteorological service provider. CAAS and MSS collaborated to develop ATM-tailored MET information and services aimed at enhancing the safety, efficiency and orderly flow of air traffic. The following lists some examples of MET information and services implemented in Singapore.

1.1. Weather briefing for ATC

MSS provides daily MET weather briefings through teleconference to air traffic controllers at the start of the morning and afternoon shifts of ATC units. Aided by visuals from a dedicated weather information portal which provides an integrated view of meteorological information in graphical and tabular formats (Figures 1), operational meteorologists brief the air traffic controllers on the weather conditions that can be expected around Singapore and the surrounding region. Timely updates are also provided by operational meteorologists through a direct communication line (dedicated hotline) should there be any change in the weather conditions.

1.2. Weather Window Products

Given that thunderstorms are common weather hazards in the deep tropics, MSS has been delivering categorical forecast on the occurrence of thunderstorms over critical watch areas. The watch areas are determined in consultation with the CAAS ATS units to align with their operational requirements. The enhanced categorical forecast (called the 'Weather Window') augments the standard Annex 3 products and provides information on the forecast of not only the occurrence of thunderstorms, but also their areal extent. The forecast is valid for 24 hours and is updated every 3 hours or on an ad-hoc basis when changes to the weather situation warrants it. The temporal resolution is higher in the shorter forecast range to provide more detailed information of a possible rapid development of adverse weather (considering the dynamic nature of tropical weather systems). The temporal resolution becomes coarser at longer forecast range to reflect the lower predictability of tropical convective-scale weather. The weather window is presented in colour-coded, tabular format for easy interpretation and is used for air traffic flow management planning.

1.3. Improvements to SIGMET Information

Apart from the weather window products, MSS has been leading the coordination with METWatch Offices (MWOs) of neighbouring States under the Operational SIGMET Coordination (OSC) for Southeast Asia initiative on the issuance of harmonised cross-FIRSIGMETs to airspace users, air traffic controllers and planners.

1.4. Nowcasting for convective weather

Tropical weather systems tend to be dominated by thunderstorms that are localized and short-lived and have significant impact on air traffic operations. Given the nature of our local weather systems, there is limited predictability, and forecasts tend to be short range. This poses difficulties for ATM. To address these challenges, MSS in collaboration with the UK Met Office has developed a convective-scale Numerical Weather Prediction (NWP) model – SINGV to better predict convective-scale weather in the tropics. In addition, Singapore is developing capabilities in nowcasting model, leveraging on techniques such as machine learning with radar and satellite data. This is a tropical convective-scale NWP/Nowcasting system that is continuously being fine-tuned to provide improved weather forecasts to support ATM decision making.

2. Means of Provision

2.1. Analysis by Operational Meteorologist

While outputs from numerical weather predictions are used to provide a first-cut forecast of the weather situation, these numerical predictions have limitations in predicting convective weather in the tropics. Local knowledge and expertise of operational meteorologists are essential and continue to be integrated in the provision of MET information and services to the users.

2.2. ATC Weather Information Portal

A dedicated web portal (ATC web portal) has been developed for the provision of more MET information in support of ATM decision-making. The web portal is an integrated platform that allow users to view the current observations and weather window forecast products to enhanced situational awareness for ATC, and to aid users in pre-tactical air traffic flow management planning. In addition, for ease of visualization that may not be best served by a tabular format of weather window, thunderstorm areas are also presented on geospatial maps. Weather briefings using this web portal allows the operational meteorologists and the users to establish a common understanding of the weather situation and to discuss on any possible adverse weather that may affect operations.

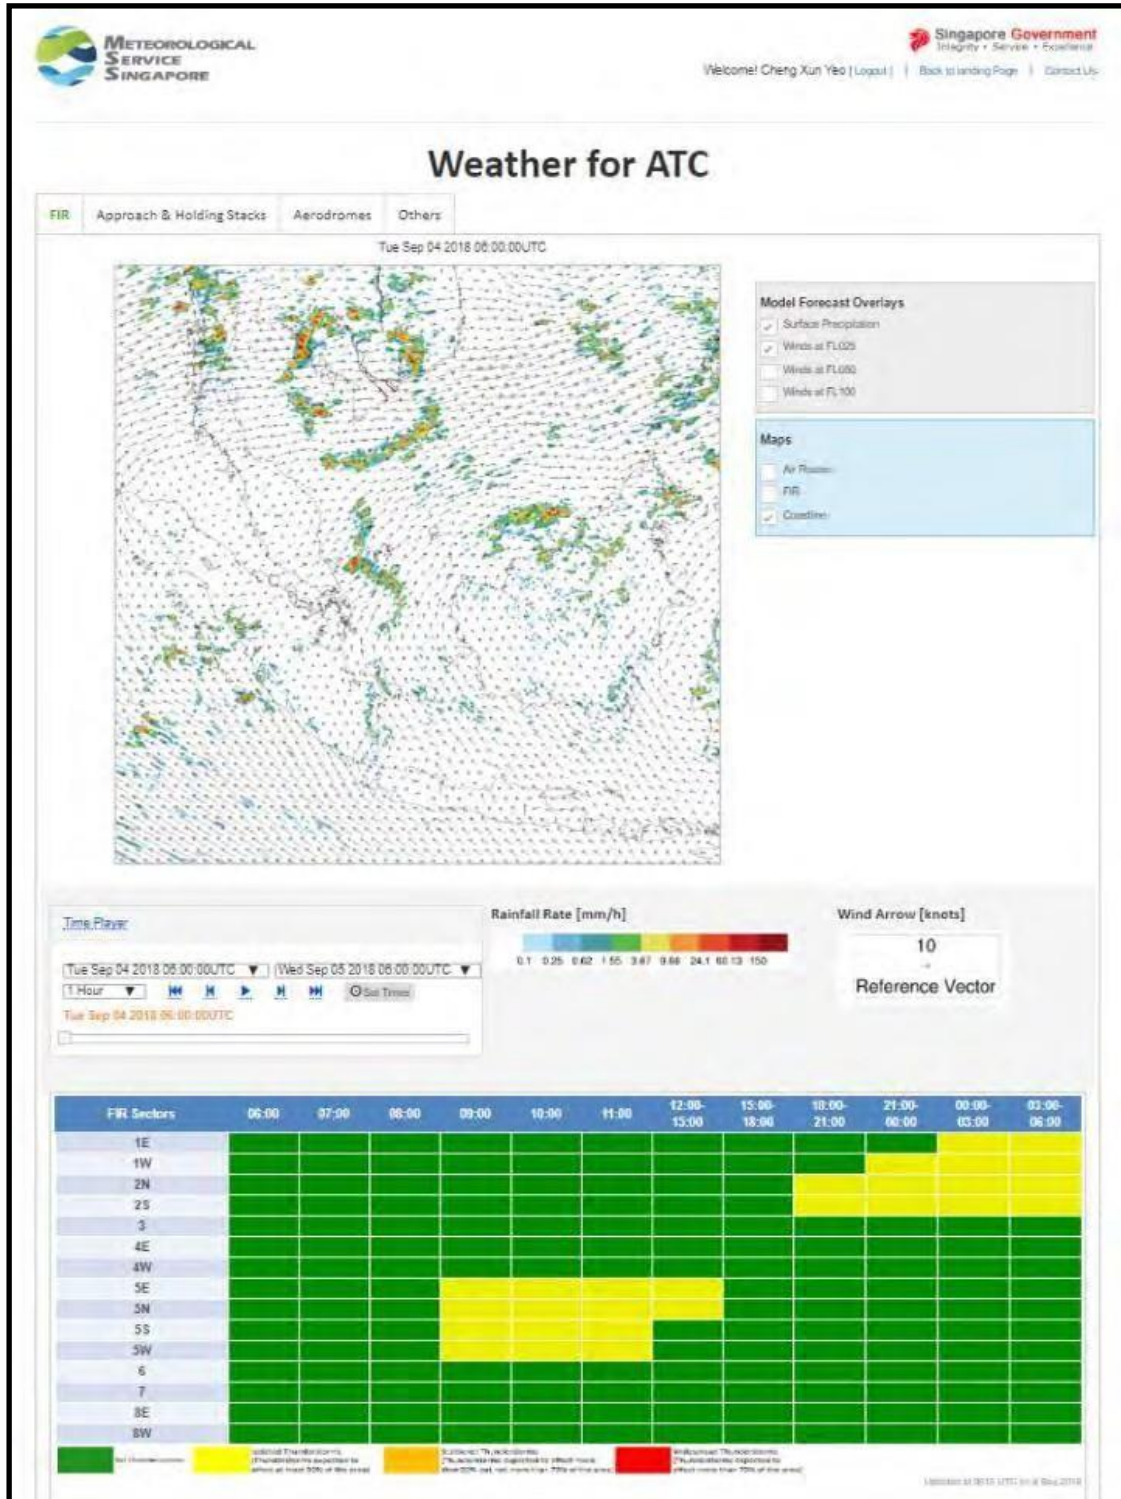


Figure 1a: Dedicated Web Portal for ATC showing Categorical Forecast of Thunderstorms.

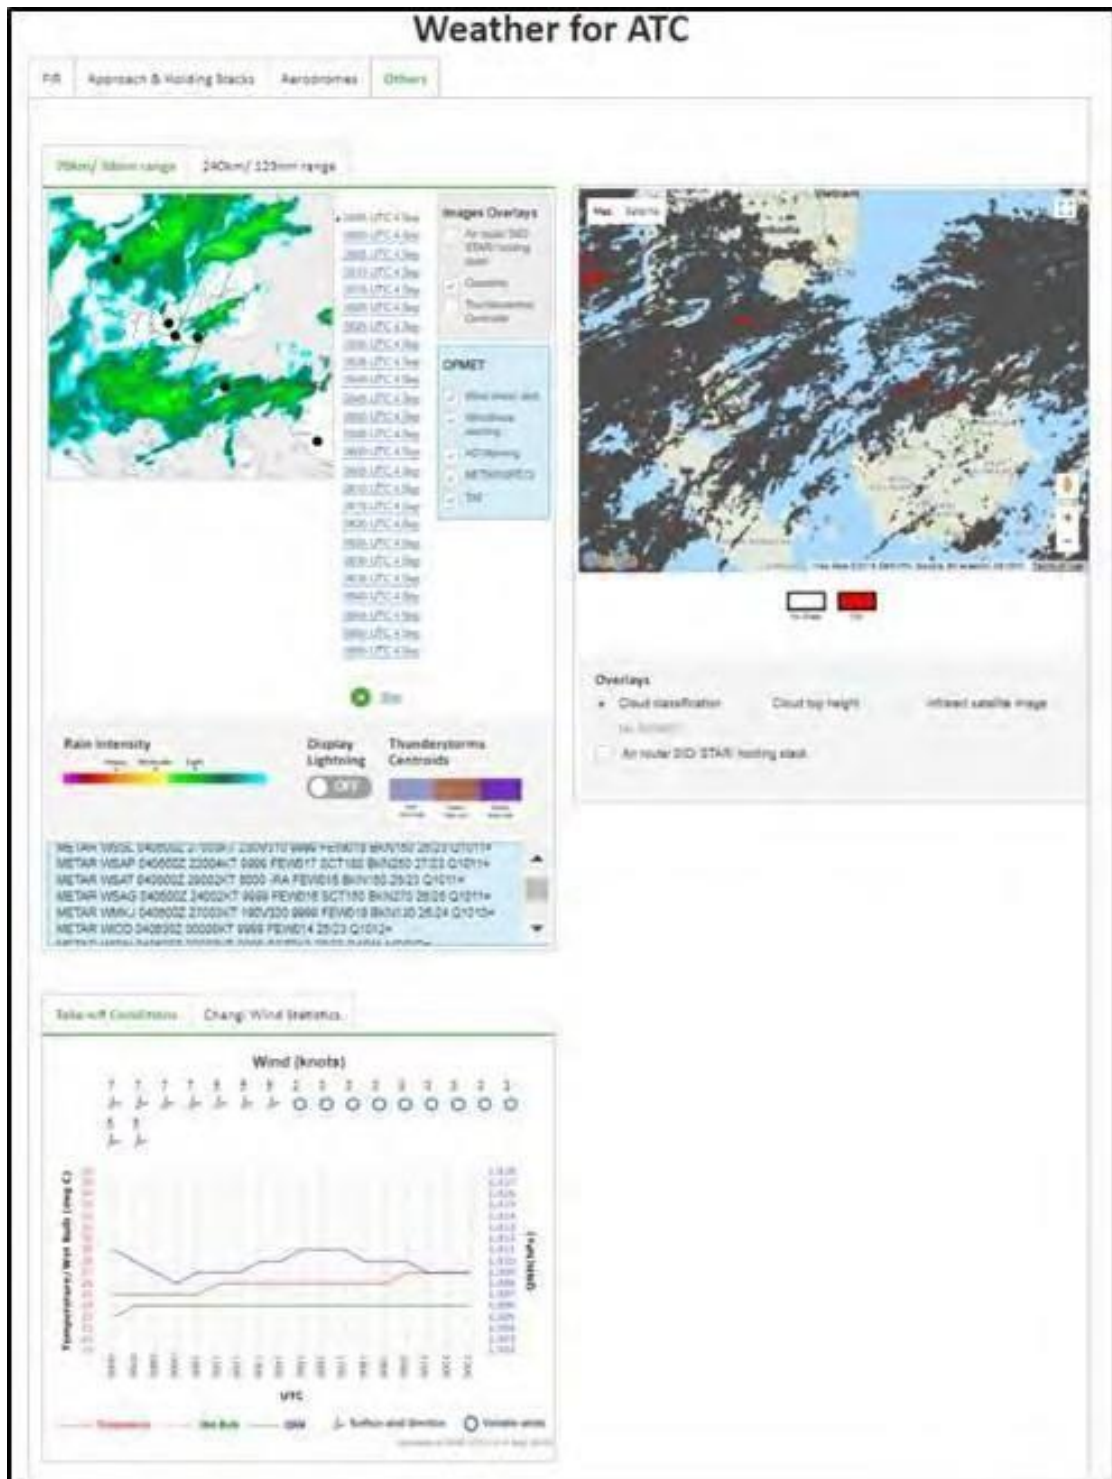


Figure 2b: Dedicated Web Portal for ATC showing observations including satellite and radar images, OPMET and AD warning information.

2.3. Direct Communication Line

A direct communication line has been established to facilitate exchange of information in a timely manner. This enables the operational meteorologists and ATC officers to readily react to changes in weather situation.

Republic of Korea

1. ATM-tailored MET Information and Services

To improve the safety of air-navigation and the efficiency of ATFM, the Ministry of Land, Infrastructure and Transport (MOLIT) of the Republic of Korea has been operating the Air Traffic Command Center (ATCC) at the Air Traffic Management Office (ATMO) since July 2017. The Aviation Meteorological Office (AMO) of the Korea Meteorological Administration (KMA) works 24 hours a day at the ATCC to support decision-making for ATFM. The AMO participates in the CMD to provide weather information for domestic airports, as well as significant weather information for foreign airports, airspace and air routes.

1.1 CDM Meeting

The ATCC regularly holds a CDM meeting once a day (0700 UTC). At the meeting, the AMO provides a weather briefing to the CDM members. Whenever a weather event that may have a significant impact on aircraft operation occurs, or is expected to occur within a few hours, a non-regular CDM meeting will be held and the AMO will provide a weather briefing.

1.1.1 CDM on heavy snow

Snow causes aircraft de/anti-icing and runway snow removal, affecting airport capacity and air traffic flow. When snow is expected to be more than 3cm, a CDM will be held prior to the regular CDM, and will be joined by the AMO, ATCC, airport operators and airlines to share weather information and analyze the impact on air traffic flow.

1.2 Weather Briefing

1.2.1 Weather briefing for ATCC

The AMO provides a weather briefing for ATCC twice a day (0000 and 0900 UTC). The weather briefing is offered during the shift of air traffic flow managers, and describes the expected weather conditions at domestic and foreign airports and airspace, which could affect ATFM during their duty.

1.2.2 Weather briefing for ACC

The AMO provides a weather briefing for Incheon and Daegu ACC once or twice a day. The weather briefing is provided during shifts of air traffic controllers, and describes the expected weather conditions (such as upper-level winds, convective clouds, etc.) at domestic airports and airspace during their duty.

1.3 Weather Analysis (Meteorological Information) to Support ATFM

The AMO provides weather analysis to support ATFM twice a day (0000 and 0700 UTC) (Fig 1). The format of the analysis was determined in November 2020, in cooperation with MOLIT. The analysis offers quantitative figures to strengthen the support for decision-making for ATFM.

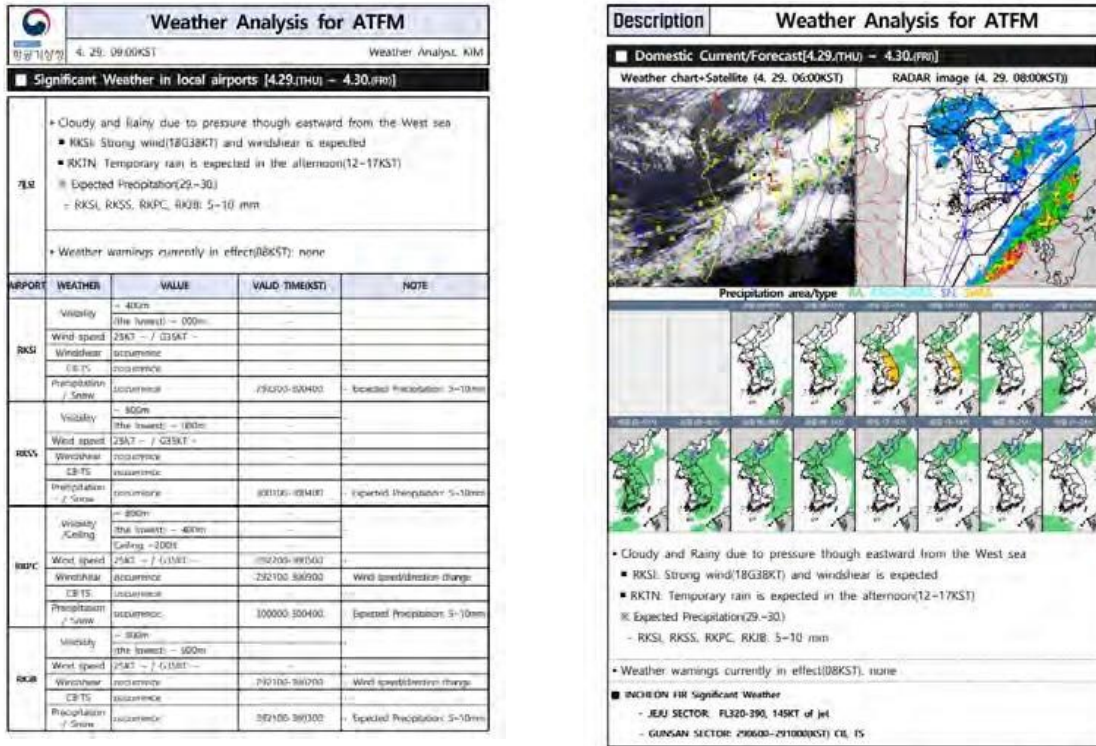


Fig 1. Weather analysis provided by AMO (twice a day) includes i) significant weather forecasts for each airport and ii) weather charts

- Target: Major domestic and foreign airports, Incheon FIR, and neighboring FIR
- Issue time: 0000 UTC and 0700 UTC (twice a day)
- Means of provision: Flow Management Terminal (FMT) System (operated by MOLIT)
- Content: Information on meteorological conditions expected to affect ATFM within 24 hours
 - 1) Detailed information for major airports (low visibility, strong wind, windshear, CB, precipitation/snow, etc.)
 - 2) Satellite images, radar images, volcanic ash information, etc.
 - 3) Weather charts of numerical model, WINTeM, etc.

1.3.1 Significant Weather Scenarios

When a typhoon, heavy snow, or low visibility, which has a significant impact on ATFM is expected to occur, the AMO provides weather scenarios with the aim of supporting not only ATFM but also flight decisions of airlines and airport operations.

- 1.3.1.1 For typhoons, similar typhoons in the past and impact-based forecasts for airports and airspace (FIX, airways) are provided. They are used to manage the air traffic volume according to the decisions on detour air route and to determine whether the aircraft should be operated or not (Fig 2).
- 1.3.1.2 For heavy snow, dry/wet snow information and hourly forecasts are provided to predict delays in aircraft due to de/anti-icing, and are utilized for ATFM.
- 1.3.1.3 For low visibility, the lowest visibility is additionally provided to minimize aircraft holding and to utilize for the low visibility operational procedures at airports.

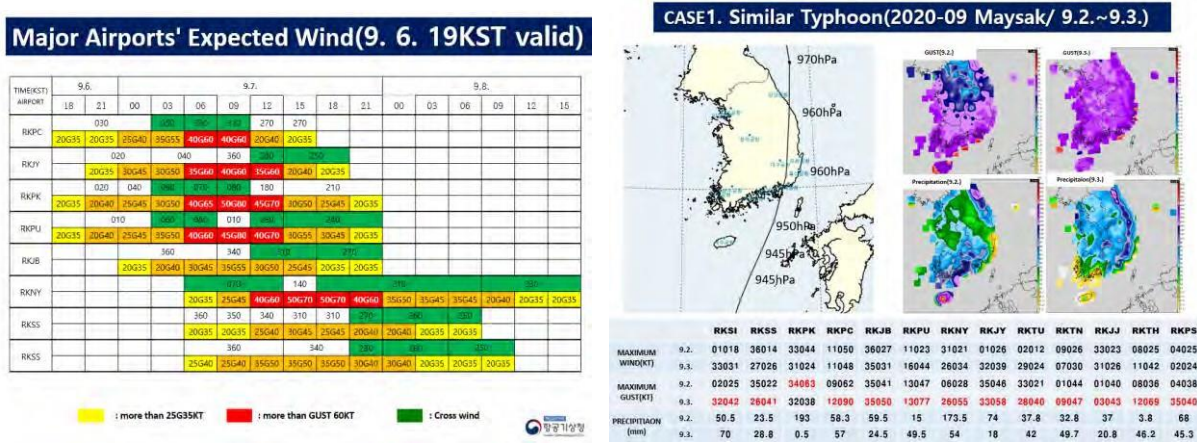


Fig 2. i) Significant Weather (Typhoon) Scenario and ii) similar typhoons in the past

1.4 Terminal Area Weather Service

1.4.1 Monitoring and prediction of hazardous convection

In cooperation with the Korea Weather Radar Center, the AMO has developed a hazardous convection monitoring and prediction system for the terminal area (Fig 3) to provide hazardous convection monitoring and prediction service. The service offers real-time observation information such as on precipitation echo, lightning, wind data by altitude, precipitation type, and hail. It provides information on precipitation echoes and atmospheric bodies with a radius of 15 kilometers around the runway and a vertical length of 10 kilometers. It also gives very short-term precipitation information within the next two hours, based on radar observations.

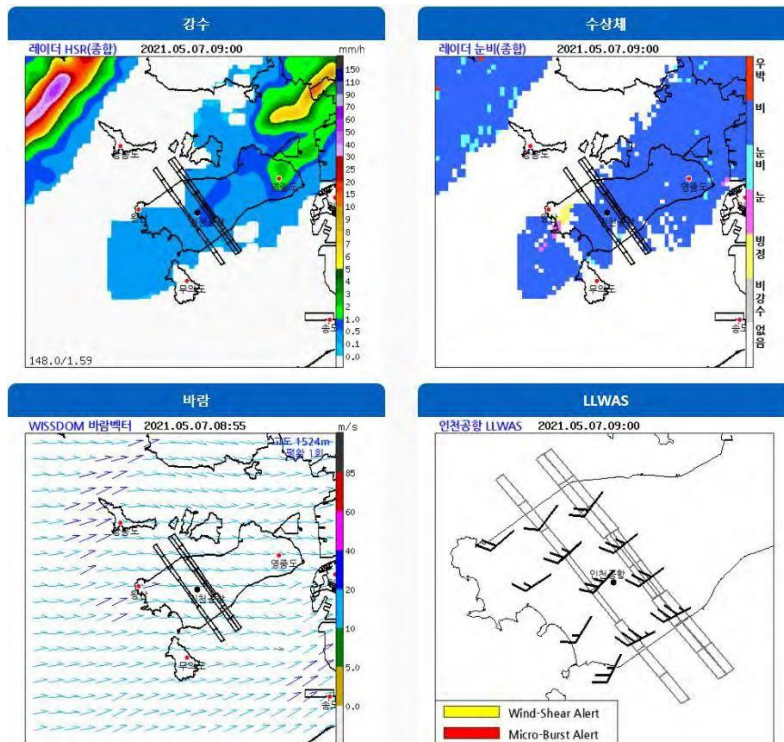


Fig 3. Significant convection monitoring and forecast for the terminal at Incheon international airport

1.4.2. Windshear forecast information

In order to provide information on the occurrence of windshear affecting aircraft, the AMO has developed windshear forecast information based on the numerical model (100 m resolution) in 2020, in cooperation with the National Institute of Meteorological Sciences (NIMS). The windshear forecast information provides windshear altitude, maximum value, and three levels of risk (in green, yellow and red) on the board (Fig 4) to help recognize windshear prediction information at a glance.

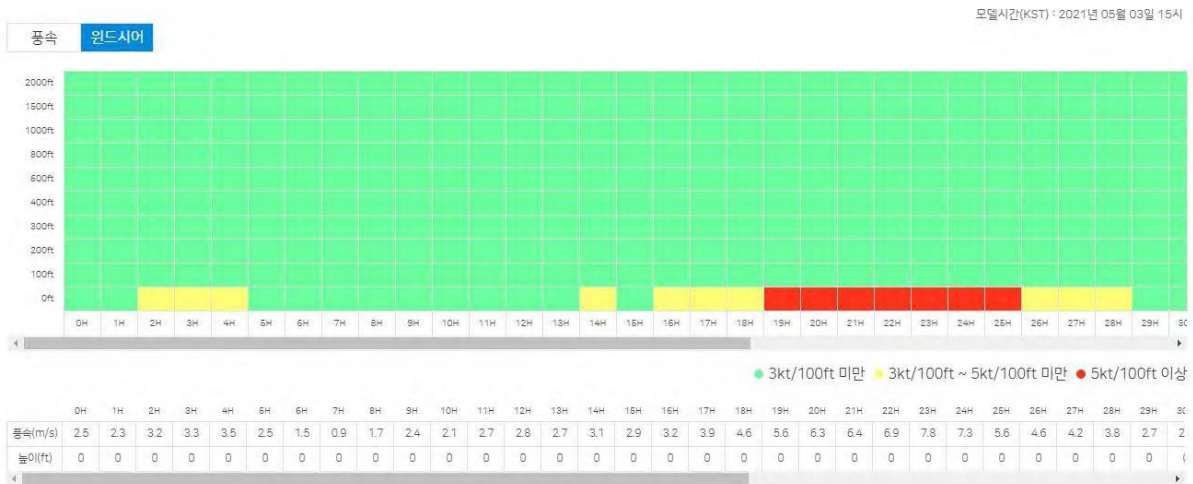


Fig 4. Display screen showing windshear information for Jeju Airport

2. Means of Provision

2.1. Flow Management Terminal (FMT) System

Real-time weather information such as radar images, satellite images, TAFs and METAR are provided by the FMT system operated by MOLIT.

2.2. Website

All MET information released by the AMO is available on the websites of the AMO, the Weather Radar Center, and the Weather Resources Map. It will be provided on an integrated platform in the future.

4.2 APPENDIX 2 Operational Scenarios of MET/ATM Collaboration

Scenario 1

CBs affected air traffic flow around approach control area of Tokyo International Airport (18 August, 2015)

1. Overview

A developing squall line was moving eastward along the coast of Tokai and Kanto Region of Japan. It caused many deviations from the planned air-routes and holdings in and around the terminal area, for aircraft approaching from west to Tokyo International Airport (RJTT). The Air Traffic Management Center (ATMC) reduced air traffic capacity (CAPA) in the affected ATC sectors, such as sector T09 and T14, and executed air traffic flow controls for aircraft flying in / heading to the air space. In addition, because some westbound aircraft departed from RJTT were forced to enter into neighboring sectors, such as sector T12 and T13, to avoid developed CBs of the squall line, ATMC finally conducted capacity reduction and flow controls for those ATC sectors to prevent possible conflicts between eastbound and westbound aircraft within those sectors (See Fig. 1 and Fig. 2).

This case shows how MET forecasters and ATM officers collaboratively dealt with this adverse weather condition described above, which occurred around a congestive international airport.

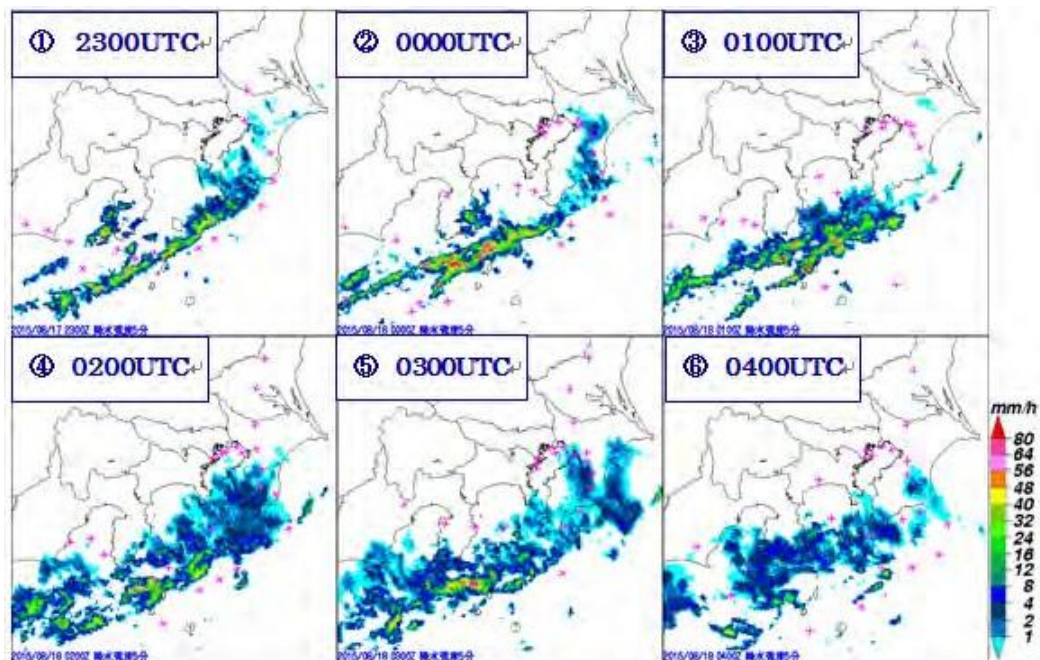


Figure 1 Radar echo intensity from 23:00 UTC 17th August to 04:00 UTC 18th August. Airplane-shaped marks indicate aircraft positions.

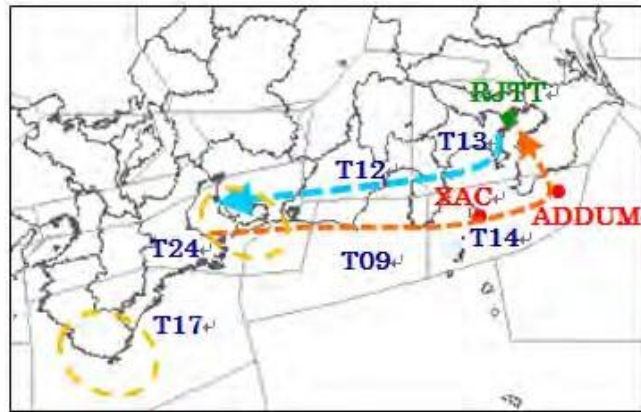


Figure 2 Name of ATC sectors (blue text) and reporting points (red text)

- Yellow circle: Holding area for aircraft flying to RJTT
- Orange arrow: Regular air-routes for aircraft approaching from western Japan to RJTT
- Light blue arrow: Regular air-routes for aircraft flying from RJTT to western Japan

2. MET/ATM collaboration

Described below is the collaborative actions taken by MET forecasters and ATM officers in this case (MET: Air Traffic Meteorology Center, Japan Meteorological Agency (ATMetC/JMA), ATM: Air Traffic Management Center, Japan Civil Aviation Bureau (ATMC/JCAB))

17th August 2015

20:00 UTC Special briefing was provided by MET

MET: "Echo top height of the CB clouds would reach more than FL460 in sector T09."

MET: "CB clouds will approach sector T14 around 21 UTC and then Tokyo Approach Control Area (ACA) around 22 UTC."

20:40 UTC Latest status of air traffic was reported by ATM

ATM: "Deviations have occurred in sector T17 and T09, because of CB clouds. We are now watching the situation of these CB clouds carefully."

21:00 UTC Special briefing was provided by MET

MET: "The CBs in sector T09 will approach XAC (reporting point) around 22 UTC and then ADDUM (reporting point) around 23 UTC"

ATM: "When will the CBs go away from Tokyo ACA?"

MET: "It will be after 00 UTC of 18th."

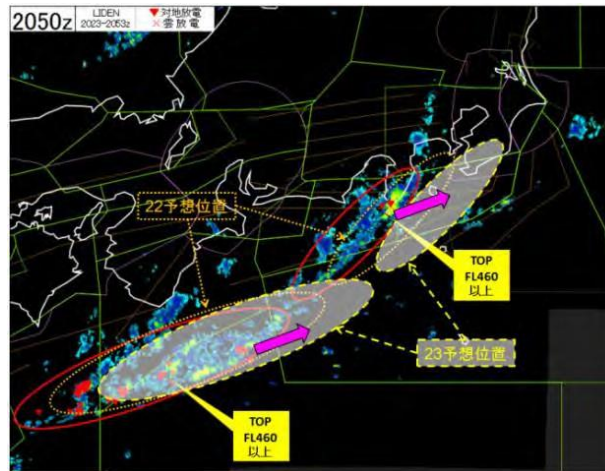


Figure 3 Material for non-regular briefing at 21:00 UTC on 17th August

21:20 UTC EDCT¹ was issued for flights heading to RJTT from west

22:00 UTC CAPA² was reduced to 93% in sector T09

22:10 UTC EDCT was issued for flights heading to RJTT through sector T09

23:08 UTC Special briefing was provided by MET

MET: "The CBs near XAC are now moving east and will approach ADDUM around 00 UTC."

MET: "The CBs newly developed around sector T09 will move to the eastward.

Then it will be merged with CB cloud area of the east."

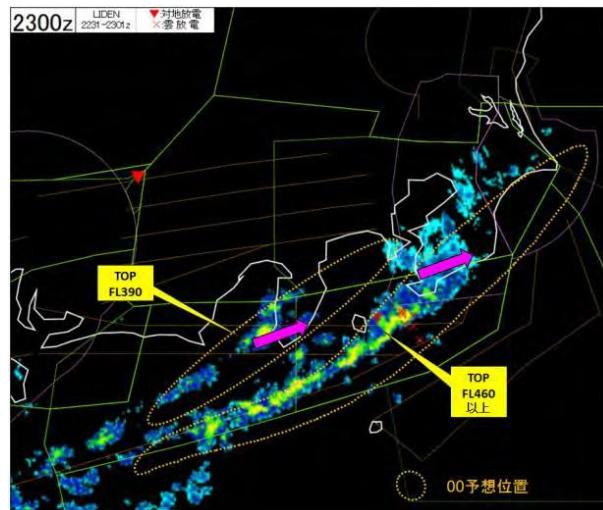


Figure 4 Material for non-regular briefing at 23:08 UTC on 17th August

¹ *Expected Departure Clearance Time (EDCT)* is assigned for the flights to certain aerodrome or airspace when air traffic volume is expected to exceed the ATC capacity of the aerodrome of the airspace.

² *CAPA* is an acronym for the ATC capacity of an aerodrome or an ATC sector.

- 23:10 UTC** Entrance Interval was reduced for sector T09
- 23:30 UTC** CAPA was reduced to 88% in sector T12, 89% in sector T13
- 23:35 UTC** Departure Interval was reduced for sector T12
- 23:40 UTC** EDCT was cancelled for flights heading to RJTT through sector T09

18th August 2015

- 01:10 UTC** Special briefing provided by MET

MET: "Developing CB area in T14 and T09 sectors will move to the northeast or the east- northeast and the peak of the development will continue until around 03 UTC."

MET: "A part of the CBs may spread to sector T12 and T13, but it would not be expected to spread largely to the north. CB clouds in T17 sector will move to the northeast or the east-northeast and spread into T09 sector around 09 UTC, but it will eventually weaken from around 06 UTC."

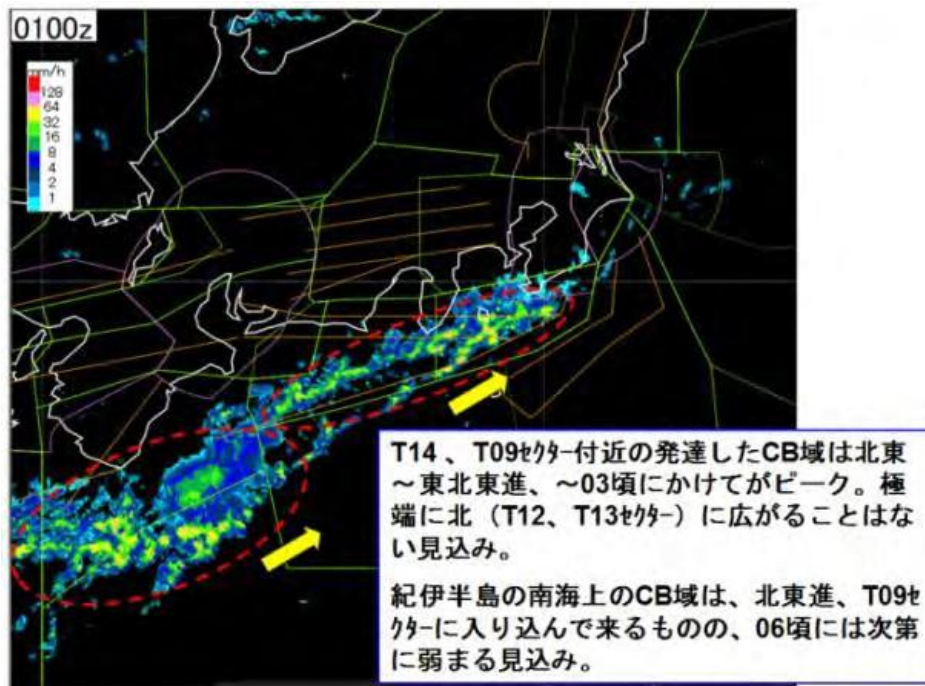


Figure 5 Material for non-regular briefing at 01:10 UTC on 18th August

- 02:00 UTC** Entrance Interval was restored for T09 sector
- 06:00 UTC** Departure Interval was restored for T12 sector
- 09:30 UTC** EDCT was cancelled for flights heading to RJTT from west

3. Summary

In this case, ATM officers shared the latest situation of air traffic flow with MET forecasters and on the other hand, MET forecasters provided special briefings for ATMC with regard to prediction of CB clouds which affected ATC sectors, such as T09 and T14. Additionally, MET forecasters paid attention also to the situation of CB clouds developed in T12 sector, because a number of westbound aircraft departed from RJTT flew into T1 and T13 sectors and, as a result, significant conflicts between eastbound and westbound aircraft were anticipated in those sectors. Based on such interactions, ATMC officers appropriately managed air traffic flow with frequent special briefings from MET forecasters.

This case shows how mutual coordination between MET forecasters and ATM officers will improve the efficiency and the safety of air traffic flow under adverse weather condition.